




Red Rubber Flange Gaskets



Model RRF • Model RRR

UNITED BRAND


ANSI B16.1 Class 125
ANSI B16.5 Class 150

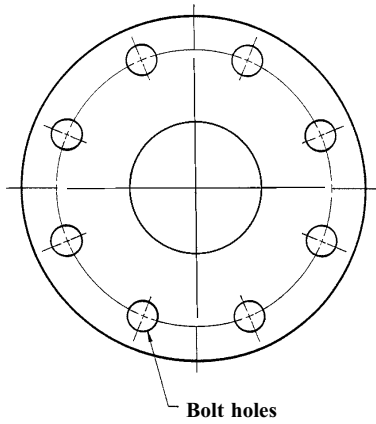

FULL FACE

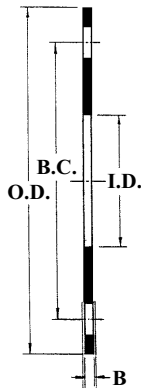

RING TYPE



- SBR Blend Elastomer
- ASTM D-1330 Gr. II
- 70-85 Durometer
- Recommended for water and wastewater

DIMENSIONS IN INCHES

Nominal Size	Part No. (Full Face)	Part No. (Ring)	ID	OD (Full Face)	OD (Ring)	B	BC (Full Face)	No. of Bolt Holes (Full Face)	Size of Bolt Holes (Full Face)
2	RRF02	RRR02	2.00	6.00	3.90	.12	4.75	4	.75
2 1/2	RRF025	RRR025	2.50	7.00	4.70	.12	5.50	4	.75
3	RRF03	RRR03	3.00	7.50	5.15	.12	6.00	4	.75
4	RRF04	RRR04	4.00	8.50	6.30	.12	7.50	8	.75
5	RRF05	RRR05	5.00	10.00	7.60	.12	8.50	8	.88
6	RRF06	RRR06	6.00	11.00	8.50	.12	9.50	8	.88
8	RRF08	RRR08	8.00	13.50	10.60	.12	11.75	8	.88
10	RRF10	RRR10	10.00	16.00	12.80	.12	14.25	12	1.00
12	RRF12	RRR12	12.00	19.00	14.75	.12	17.00	12	1.00
14	RRF14	RRR14	14.00	21.00	17.15	.12	18.75	12	1.13
16	RRF16	RRR16	16.00	23.50	19.90	.12	21.25	16	1.13
18	RRF18	RRR18	18.00	25.00	21.15	.12	22.75	16	1.25
20	RRF20	RRR20	20.00	27.50	23.60	.12	25.00	20	1.25
24	RRF24	RRR24	24.00	32.00	27.95	.12	29.50	20	1.38
30	RRF30	RRR30	30.00	38.75	34.75	.12	36.00	28	1.38
36	RRF36	RRR36	36.00	46.00	41.25	.12	42.75	32	1.63

These gaskets conform to “old standard” dimensions per Appendix C of ANSI/AWWA C111/A21.11. Gaskets of this type are required by most flanged pipe fabricators (including Fab Pipe Inc.) as a condition of warranty.

Ring gaskets are recommended for 14” and larger sizes if flat gaskets are used. Full-face requirements above 14” size may be accommodated through the use of “special gaskets” (see Seal-Tite gaskets).

Form No. FP0055

Note: Design subject to change without notice.

Fab pipe inc.



21425 147th Ave. N., Rogers, MN 55374
Tel: (763) 428-2259 • Fax: (763) 428-4978

