




Ductile Iron Wall Pipe



Wall Pipe Installation - Length

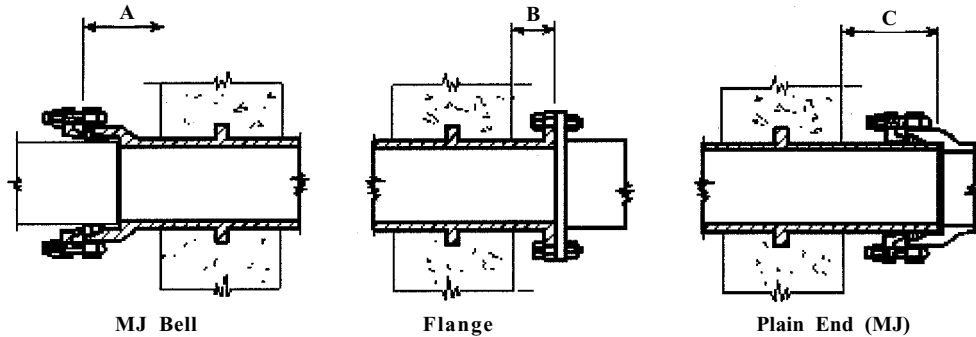


Wall pipe end connections may be set at a distance from the surface of the wall or may be set flush to the wall surface. When set flush to the wall surface, bolt holes should be tapped for studs (See Stud Bolts). When set at a distance from the wall surface the following minimum dimensions should be considered to facilitate the installation of bolting hardware

Nominal Size	Length in inches		
	A MJ Bell	B Flange	C MJ Plain
3	5	1 3/4	5 1/4
4	5 3/4	2 1/4	6
6	5 3/4	2 1/4	6
8	6 1/4	2 1/2	6 1/2
10	6 1/2	2 1/2	6 1/2
12	6 1/2	2 1/2	6 1/2
14	7	3	7 3/4
16	7 1/4	3	7 3/4
18	7 1/2	3 1/4	7 3/4
20	7 1/2	3 1/2	7 3/4
24	8	3 3/4	8 1/4
30	9 1/2	4 3/4	9 3/4
36	9	5 1/4	9 3/4
42	10	6	10
48	10	6 1/2	10

Wall Pipe Installation - Alignment

In order that flanged piping may be correctly connected to embedded wall pipe, it is necessary to position wall pipes such that the flange bolts holes straddle the horizontal and vertical centerlines.



Form No. FP0201

fab pipe inc.

021



21425 147th Ave. N., Rogers, MN 55374
Tel: (763) 428-2259 • Fax: (763) 428-4978

